

PRODUCT DATA SHEET

Sika® Ucrete® MT

(formerly Ucrete® MT)

Hygienic, slip-resistant, heavy-duty polyurethane floor screed

DESCRIPTION

Sika® Ucrete® MT is a 4–6 mm, lightly-textured, polyurethane, heavy-duty floor screed. It has very good resistance to aggressive chemicals, heavy abrasion and thermal shock.

USES

Sika® Ucrete® MT is used as a wearing layer screed for Sika® Ucrete® flooring systems.

Sika® Ucrete® MT is used within wet and dry process areas including the following application areas:

- Food and beverage facilities
- Pharmaceutical facilities
- Chemical and processing facilities
- Manufacturing facilities and workshops

Please note:

- The Product may only be used by experienced professionals.

CHARACTERISTICS / ADVANTAGES

- Expert installation by fully trained and licensed applicators
- Resistant to bacterial or mould growth
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed
- Can be accelerated with Sika® Ucrete® Accelerator for fast installation within a 12-hour window
- Very good resistance to a wide range of chemicals
- Very good mechanical resistance
- Impermeable to liquids
- Non-tainting from the end of mixing
- Low VOC emissions
- Thermal expansion properties similar to concrete
- Suitable for application on to 7-day-old concrete and 3-day-old polymer screed

APPROVALS / CERTIFICATES

- Food and Beverage Facilities Suitability, Sika® Ucrete®, HACCP, Test Report No. I-PE-769-SA-2-RG-06b
- Halal Certification Europe (HCE), Sika® Ucrete®, WHFC, Certificate No. 21453-2/1/1/Y1
- Indoor Air Comfort Gold EN 16516, Sika® Ucrete®, eurofins, Certificate No. IACG-321-01-01-2023

PRODUCT INFORMATION

| | |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Composition | Water-based polyurethane cement hybrid |
| Packaging | Refer to the current price list for available packaging variations. |
| Shelf life | Always refer to the best-before date of the individual packaging. |
| Storage conditions | The Product must be stored in original, unopened and undamaged sealed packaging in dry conditions at temperatures between +5 °C and +30 °C. Always refer to the packaging. Refer to the current Safety Data Sheet for information on safe handling and storage. |

| | | |
|--------|--------------|------------------------------------------------------------------------------------------------------|
| Colour | Cured colour | Red, Orange, Yellow, Bright Yellow, Cream, Grey, Light Grey, Green, Light Green, Green/ Brown, Blue. |
|--------|--------------|------------------------------------------------------------------------------------------------------|

| | | | |
|---------|---------------|-----------|-----------------|
| Density | Mixed Product | ~2.0 kg/l | (EN ISO 2811-1) |
|---------|---------------|-----------|-----------------|

TECHNICAL INFORMATION

| | | | |
|----------------------|-------------------------|----------------------|--------------|
| Compressive strength | Cured 28 days at +23 °C | 53 N/mm ² | (EN 13892-2) |
|----------------------|-------------------------|----------------------|--------------|

| | | | |
|-----------------------------|-------------------------|----------------------|--------------|
| Tensile strength in flexure | Cured 28 days at +23 °C | 14 N/mm ² | (EN 13892-2) |
|-----------------------------|-------------------------|----------------------|--------------|

| | | | |
|------------------|-----------------------------|-------|-------------|
| Tensile strength | Cured for 28 days at +20 °C | 6 MPa | (BS 6319-7) |
|------------------|-----------------------------|-------|-------------|

| | | | |
|---------------------------|--------------------------------------------|--|-----------|
| Tensile adhesion strength | > 2.0 N/mm ² (concrete failure) | | (EN 1542) |
|---------------------------|--------------------------------------------|--|-----------|

| | | | |
|----------------------------------|---------------------------------------|--|-------------|
| Coefficient of thermal expansion | 4 × 10 ⁻⁵ °C ⁻¹ | | (ASTM C531) |
|----------------------------------|---------------------------------------|--|-------------|

| | | | |
|------------------------|----------------|----------------------|--------------|
| Skid / slip resistance | PTV, slider 96 | 40–45 wet conditions | (EN 13036-4) |
|------------------------|----------------|----------------------|--------------|


| | | | |
|---------------------|---------|--------|--|
| Service temperature | Maximum | +80 °C | |
| | Minimum | -25 °C | |

Chemical resistance Laboratory-defined resistance to many individual chemicals. Before proceeding, contact Sika Technical Service for specific information.

| | | |
|------------------|---------------------------|--------------|
| Reaction to fire | Class B _{fl} -s1 | (EN 13501-1) |
|------------------|---------------------------|--------------|

SYSTEMS

System structure

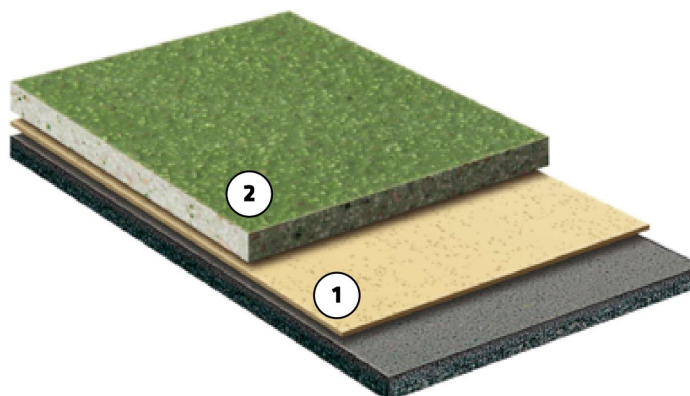

| Layer | Product |
|------------------|-------------------|
| 1. Primer | Sika® Ucrete® PSC |
| 2. Wearing layer | Sika® Ucrete® MT |

APPLICATION INFORMATION

| Consumption | Layer | Product | Consumption |
|-------------|---------------|-------------------|----------------------------------------------------------------------|
| | Primer | Sika® Ucrete® PSC | 0.2–0.4 kg/m ² |
| | Wearing layer | Sika® Ucrete® MT | 10–11 kg/m ² for 4 mm 13–14 kg/m ² for 6 mm |

| | |
|-----------------|---------|
| Layer thickness | ~4–6 mm |
|-----------------|---------|

| | | |
|------------------------------------------------------------------------------------------------|------------------------------|------------------------------------------|
| Product temperature | Maximum | +30 °C |
| | Minimum | +10 °C |
| Ambient air temperature | Maximum | +35 °C |
| | Minimum | +8 °C |
| Substrate temperature | Maximum | +30 °C |
| | Minimum | +8 °C |
| Curing time | Substrate temperature | Return to traffic |
| | +8 °C | 16–24 hours |
| | +10 °C | 4 hours (with Sika® Ucrete® Accelerator) |
| Note: Times are approximate and will be affected by changing ambient and substrate conditions. | | |

BASIS OF PRODUCT DATA

All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data may vary due to circumstances beyond our control.

FURTHER INFORMATION

Select from the following specification clauses as required:

- A 4 mm Sika® Ucrete® MT floor is fully resistant to high temperature spillage and discharge up to +70 °C. Suitable for freezer temperatures down to -15 °C.
- A 6 mm Sika® Ucrete® MT floor is fully resistant to liquid spillage and discharge up to +80 °C and can be lightly steam-cleaned. Suitable for freezer temperatures down to -25 °C.

ECOLOGY, HEALTH AND SAFETY

For information and advice on the safe handling, storage and disposal of chemical products, users shall refer to the most recent Safety Data Sheet (SDS) containing physical, ecological, toxicological and other safety-related data.

APPLICATION INSTRUCTIONS

SUBSTRATE PREPARATION

IMPORTANT

Reduced service life due to incorrect treatment of cracks

The incorrect assessment and treatment of cracks may lead to a reduced service life and reflective cracking.

1. For static cracks, ensure the width is suitable for overcoating with Sika® Ucrete® MT.
2. For dynamic cracks, ensure the movement is within the movement capacity of Sika® Ucrete® MT.

TREATMENT OF JOINTS AND CRACKS

Construction joints and existing static surface cracks in substrate require pre-treating before full layer application. Use Sikadur® or Sikafloor® resins.

The Product can be applied on green or damp concrete with no standing water. Allow for at least 3 days for early concrete shrinkage to occur to prevent shrinkage cracks from appearing on the wearing surface.

Cementitious substrates must be structurally sound and of sufficient compressive strength (minimum 30 N/mm²) with a minimum tensile strength of 1.5 N/mm².

Substrates must be clean, dry and free of contaminants such as dirt, oil, grease, coatings, laitance, surface treatments and loose friable material.

APPLICATION

Application must be undertaken by a fully trained and licensed Sika® Ucrete® applicator.

LOCAL RESTRICTIONS

Please note that as a result of specific local regulations the declared data for this product may vary from country to country. Please consult the local Product Data Sheet for the exact product data.

LEGAL NOTES

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with Sika's recommendations. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The user of the product must test the product's suitability for the intended application and purpose. Sika reserves the right to change the properties of its products. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

Sika Kenya Limited

Mudher Industrial Complex, Mombasa
Road
P.O Box 38645 - 00623 Nairobi, Kenya
Mobile: +254 711 140234 / +254 786
140234
Web: ken.sika.com

Product Data Sheet

Sika® Ucrete® MT
September 2024, Version 02.01
02081400000002002